

ENGINEERING SPECIFICATIONS FOR 15" GAS FIRED INFRA RED BURNER



SERIES	INPUT	RADIANT SURFACE AREA	NET WEIGHT
BC15A-N BC15A-P	10,000 - 14,000 BTU/h	28 Sq. In.	2 lbs. - 8 oz.

Normal Manifold Pressure

- Natural Gas- 5.0" W.C.
- Propane Gas- 10.0" W.C.

Minimum Inlet Pressure

- Natural Gas- 6.0" W.C.
- Propane Gas- 11.0" W.C.

Inlet Pipe Size

- 1/8" NPT

Mounting Angle

- 0°-90°

Mounting Tab Slots

- .438" x .188"

Options





- Gas Orifice
- Gas Orifice Locator Bracket
- Brass Fittings
- Factory Pre-Burn
- Mounting Tabs
- Markings

NOTE: If directing infra-red rays downward, it is recommended that a true venturi is used. Please note drawing on back.



PROCESSBURNERS.COM

21400 Hoover Road • Warren, Michigan 48089
Phone: 586-756-0950 • Fax: 586-756-2626
sales@drp-co.com • www.processburners.com

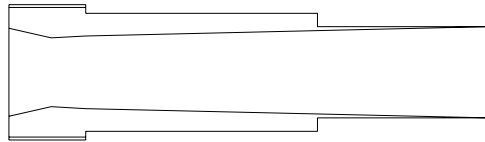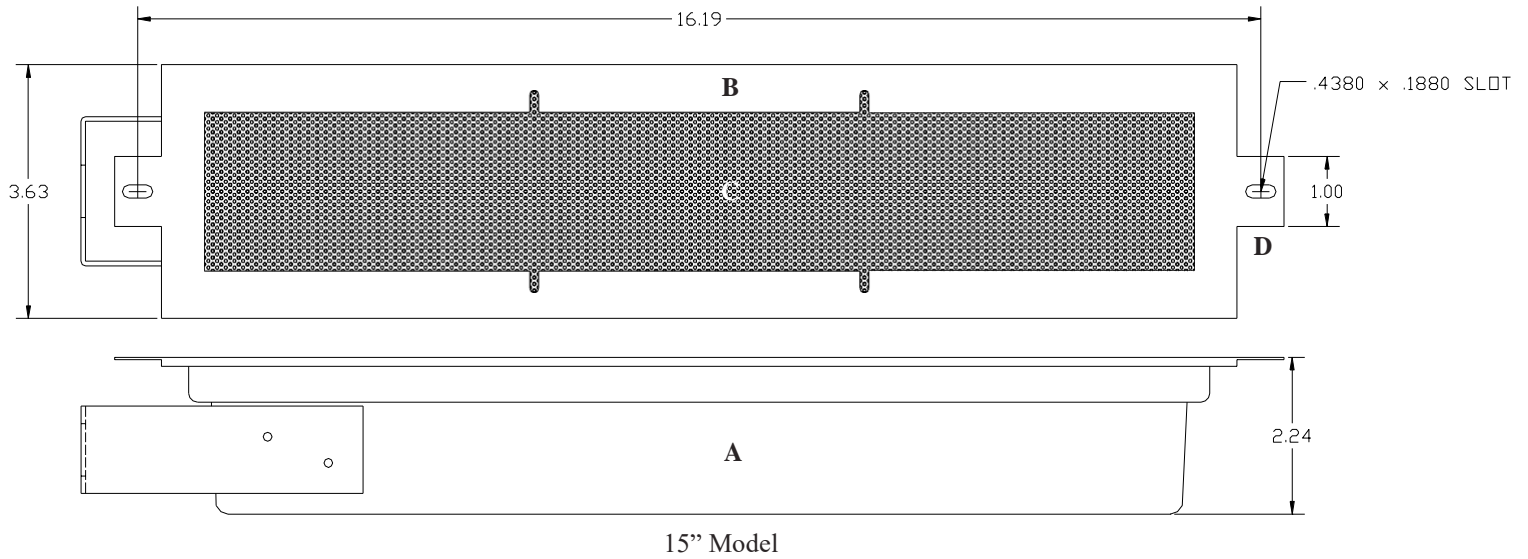

E.

F

DESCRIPTION

- A. Chamber (Aluminized Steel)
- B. Hold Down (304 #3 Stainless Finish)
- C. Ceramics
- D. Mounting Tabs
- E. Telescopic Venturi
- F. Internal Venturi